


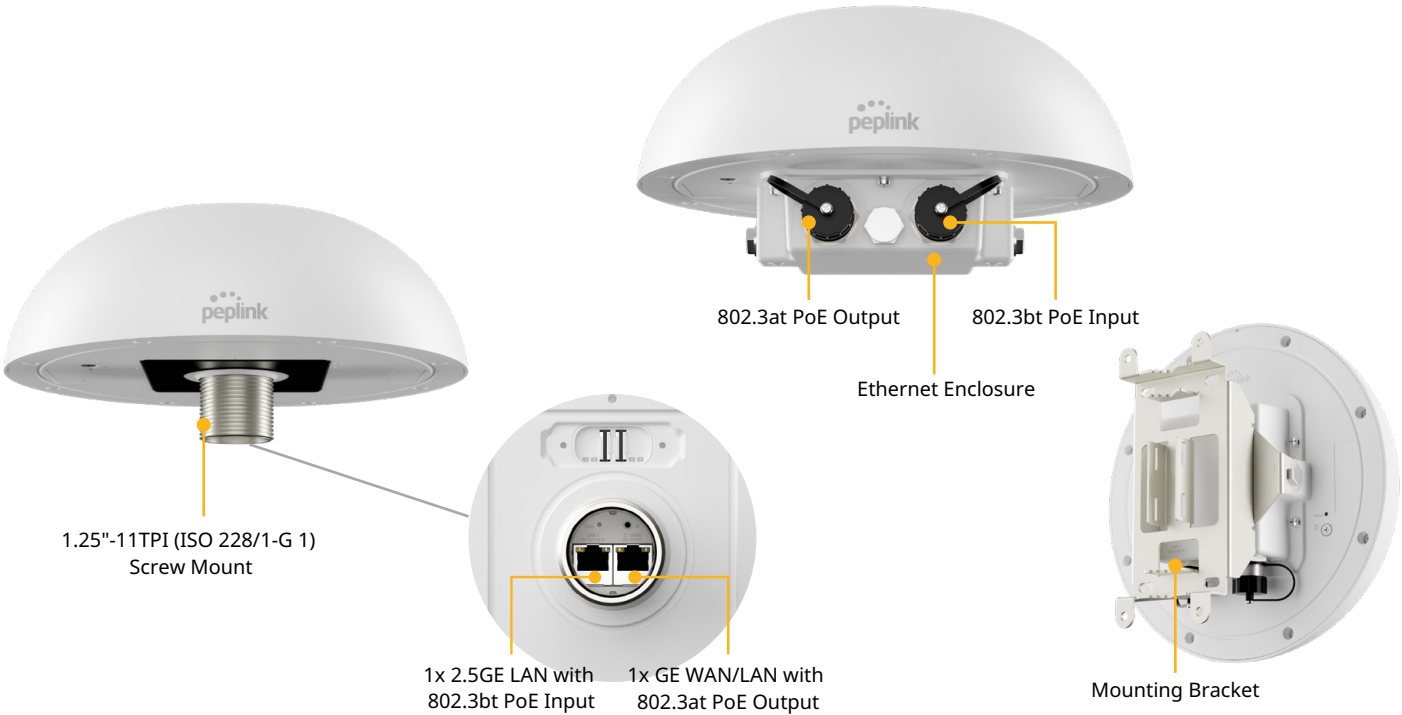

Specifications

WAN Interface	1x 10/100/1000M Ethernet 2x 5G Modems with Redundant SIM Slots	Power Consumption	24 W (max., without PoE output)
LAN Interface	1x 10/100/1000/2500M Ethernet	Dimension	5.12 inches (radius) x 4.79 inches (height) 130 mm (radius) x 122 mm (height)
Wi-Fi Interface	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MIMO Wi-Fi WAN and/or AP	Weight	With Ethernet Enclosure: 4.19 pounds / 1.9 kg Without Ethernet Enclosure: 3.53 pounds / 1.6 kg
Number of PepVPN SpeedFusion Peers	2	Operating Temperature	-40°– 149°F / -40°– 65°C
Enclosure	Rugged outdoor IP67 (with Ethernet Enclosure)	Humidity	15% – 95% (non-condensing)
Recommended Users	150	Certifications	FCC, CE, RoHS
Cellular Data Rate (Downlink / Uplink)	5G: 3.4 Gbps / 900 Mbps CAT-20: 1.6 Gbps / 200 Mbps	Package Content	Dome Pro Duo, Ethernet Enclosure, 2x Waterproof Ethernet Connector (ACW-112), Mounting Kit Set
Antenna	8X8 Internal Cellular Antennas 2X2 Internal Wi-Fi Antennas 1x Internal GPS Antenna	SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (2 profiles) RemoteSIM from SIM Injector
Power Input	1x 802.3at PoE+ (without PoE output) / 1x 802.3bt PoE+ + (with PoE output)	Warranty	1-Year Limited Warranty
Power Output	1x 802.3at PoE+		

¹ Maximum theoretical data rates.

Specifications are subject to change without notice.

Ordering Information

Product Code	Regions	5G Bands	LTE Bands
DOM-PRO-DUO-5GN-PRM Embedded Modem(s): 2x 5G	APAC & EMEA	5G (SA & NSA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70, n71, n75, n76, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

Featured Add-on

Product Code	Description
PRM-K-1Y / PCP-K-1Y	PrimeCare K / PrimeCare+ K (1-Year)
PRM-K-2Y / PCP-K-2Y	PrimeCare K / PrimeCare+ K (2-Year)
PRM-K-4Y / PCP-K-4Y	PrimeCare K / PrimeCare+ K (4-Year)